

**ABB**geprüft 2011  
ATDP 028

Made in Switzerland

Type

ACS1113-W2-V8-00-SM04-A0NA-0C30-030C-000C0-EN

|                                       |   |                   |                              |                          |          |
|---------------------------------------|---|-------------------|------------------------------|--------------------------|----------|
| Rated input voltage / 3-ph            | 2X 1903   | V                 | Rated aux voltage / 3-ph     | 380                      | V        |
| Rated input current                   | 480   | A                 | Rated aux current / 3-ph     | 7.3                      | A        |
| Rated input frequency                 | 50  | Hz                | Rated aux voltage / 1-ph UPS | 220                      | V        |
| Max permissible short-circuit current | 15  | kA, 1s (symmetr.) | Rated aux current / 1-ph     | 3.3                      | A        |
| Rated output voltage / 3-ph           | 0 3300  | V                 | Weight                       | 3388 / 7469              | kg / lbs |
| Rated output current                  | 652   | A                 | Cooling / design pressure    | Water max 10 bar 4 35 °C |          |
| Rated output frequency                | 60  | Hz                | Enclosure class              | IP 31                    |          |
| Output frequency range                | 0 66  | Hz                | Production Ref. No.          | 0011068842/000130        |          |
| Duty class                            | continuous duty, 110% overload (1 min every 10 min) |                   | Serial No.                   | 3BHB901004663            |          |
|                                       |   |                   | Year of construction         | 2011                     |          |

Compliant to IEC 60146-1-1

ABB

Packing Label

9999

Material no

3BHL000452R0001

1 ST


Material

ACST000

Order no/positions

11068842 /000130 Project Xiang Lu

Material Document

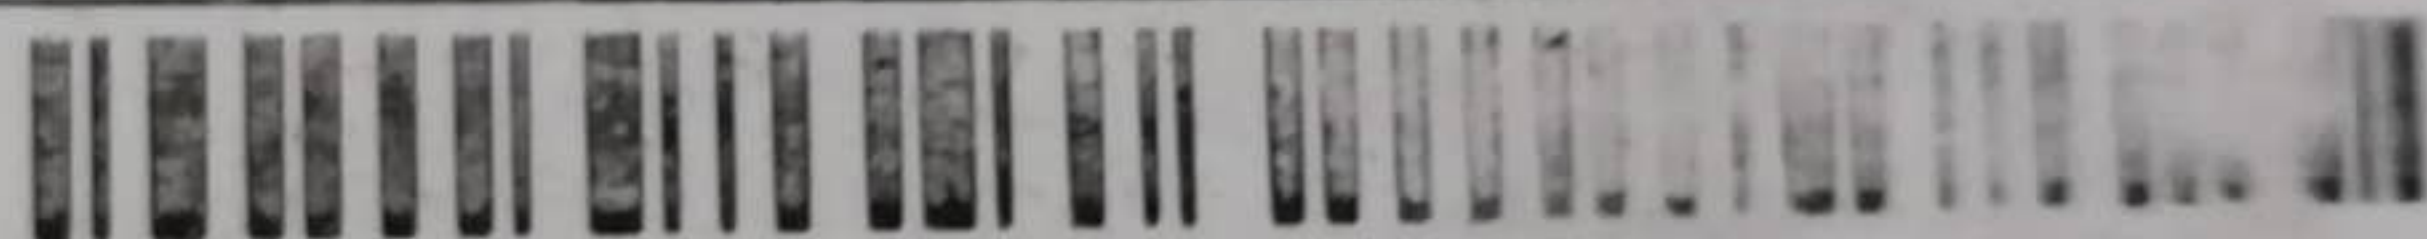

0049035176000120.1